


# GB910

## HYDRAULIC POWERUNIT

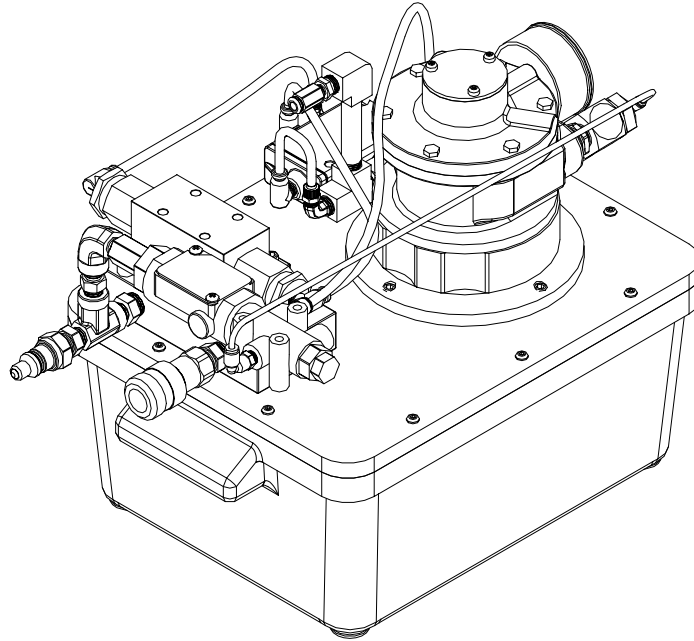

### DESCRIPTION:

The GB910 Hydraulic Powerunit is a portable power source designed to operate a wide range of hydraulic installation tools. The unit is air powered, air actuated and delivers up to 10,000 psi working pressure. The trigger on the installation tool remotely controls the hydraulic fluid directional flow. The unit consists of a two position air hydraulic pump, four way control valve and relief valve mounted on the reservoir.

The rapid tool piston movement is obtained through a higher (50 cubic inches a minute) output pump. Quick disconnect hydraulic couplings and air control socket are included to attach the equipment hydraulic hoses and air control tube.

The GB910 Hydraulic Powerunit is available separately or in kits including hydraulic quick-disconnect couplers, air connectors, air lines and hydraulic hoses in various lengths.

GB910-12 includes the GB910 Powerunit and 12 ft. Hose Kit,  
part #910701.

GB910-26 includes the GB910 Powerunit and 26 ft. Hose Kit,  
part #910705.

GB910-38 includes the GB910 Powerunit and 38 ft. Hose Kit,  
part #910709.

GB910-52 includes the GB910 Powerunit and 52 ft. Hose Kit,  
part #910714.

**GAGE BILT**  
MADE IN U.S.A.

**GAGE BILT Inc.**

44766 Centre Court (586) 226-1500  
Clinton Twp. MI 48038 (586) 226-1505 Fax  
e-mail: [solutions@gagebilt.com](mailto:solutions@gagebilt.com) / [www.gagebilt.com](http://www.gagebilt.com)



## GB910 POWERUNIT SPECIFICATIONS



**NOTE:**

An air line filter-lubricator is highly recommended for proper operation and extended life.

**NOTE:**

Shipped with Pull pressure at 10,000 psi (68,950 kPa) & Return pressure at 6,000 psi (41,370 kPa) for GB7624. When attaching GB585A set Pull pressure to 5,400-5,700 psi (37,350-39,300 kPa) & Return pressure 2,200-2,400 psi (15,200-16,500 kPa).

Width .....13.0 inches

Length .....20.5 inches

Height .....14.0 inches

Reservoir Capacity ..... 2 gallons

Power Source - compressed air ..... 90-100 psi

Air Consumption (continuous operation): ..... 62 CFM

Remote Control-Air piloted 4-way valve actuated by a trigger in the tool

Motor ..... Air Motor

Pump - Air Hydraulic, Rapid Advance and Swage ..... 50 cu. in./min. @ 5000 psi

Output Pressure:

Pull ..... Adjustable to 10,000 psi.

Operating temperature:

Ambient .....min. 0° F ..... -18° C

Hydraulic Fluid...max. 140° F ..... 65° C

Hydraulic Fluid:

Good Quality Hydraulic Oil.