



NOSE ASSEMBLY DATA SHEET

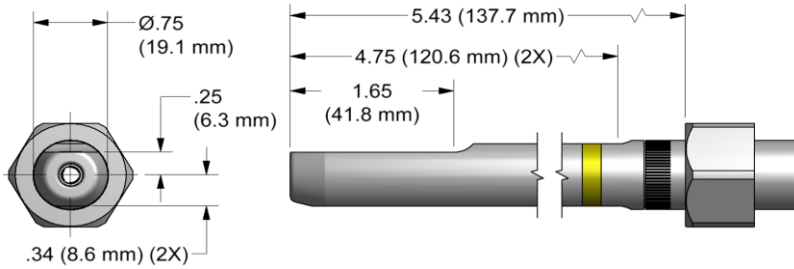

SLOTS ON RETAINING NUT STOP, SUPPLIED WITH TOOL, FIT OVER EARS ON ANVIL ASSY

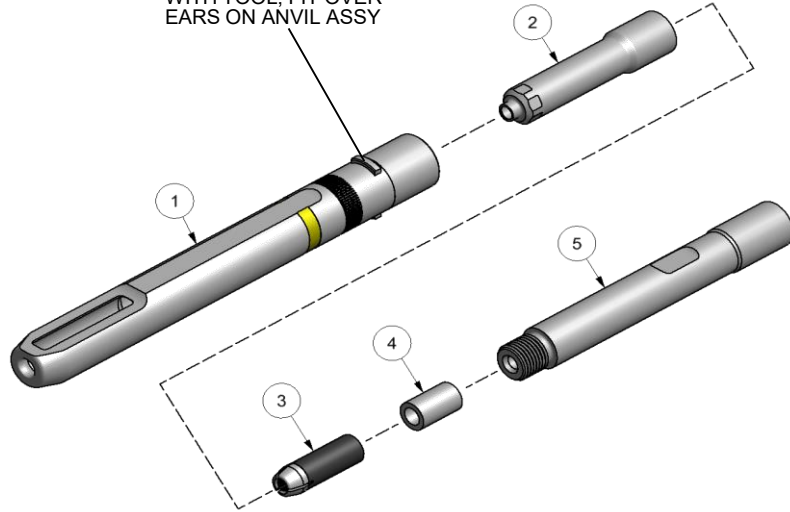

ASSEMBLY:

Notes:

- Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.
 - Tighten collet (3) and extension-collet (6) to 80 - 100 IN-LBS. (.36 - .44 Kn) torque.
 - If nose assy is assembled as it is when purchased new, follow steps 3 - 5 to attach to tool.
- Insert super grip jaw assy (3) into rear of collet (2). Place spacer (4) on rear of super grip jaw assy (3)
 - Thread collet (2) to extension-collet (5) using flats provided.
 - Thread assembled collet (2) and extension-collet (5) onto piston of tool using flats provided and hex in rear of piston.
 - Slide anvil assembly (1) over collet (2).
 - Slide retaining nut stop and retaining nut over ears on anvil (see exploded view) and tighten to tool.

DISASSEMBLY:

Reverse assembly instructions.

NOTE:

Yellow logo designates nose assemblies for lightweight GP® fasteners.



4/11 REV. 3/26

*Anvil Assembly includes 35208 retainer

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fastener:	Recommended Tool:
Non Self-Releasing 3/16" Ø		LGP® Lockbolt ASNA2391-3 ASNA2392-3	GB731
			Alternate Tools: GB2480(A)
Ref. No.	Qty.	Description	LGP06-731-53CN
1	1	Anvil	16015
2	1	Collet	26612
3	1	Super-Grip Jaw Assembly	30654-CS
4	1	Spacer	60618
5	1	Extension-Collet	70652

GP® AND LGP® ARE REGISTERED TRADEMARKS OF HOWMET AEROSPACE. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.