



NOSE ASSEMBLY DATA SHEET

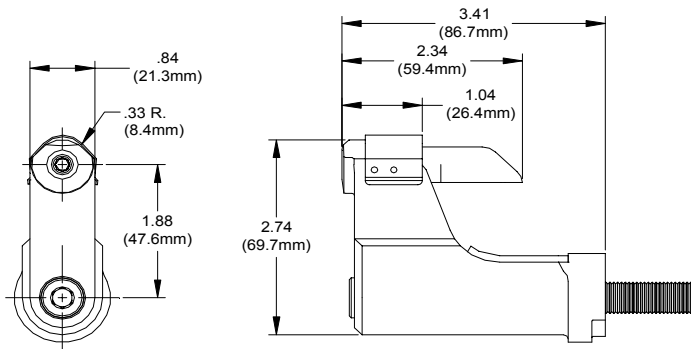

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (9) use for closed access applications only or when clearance is an issue!

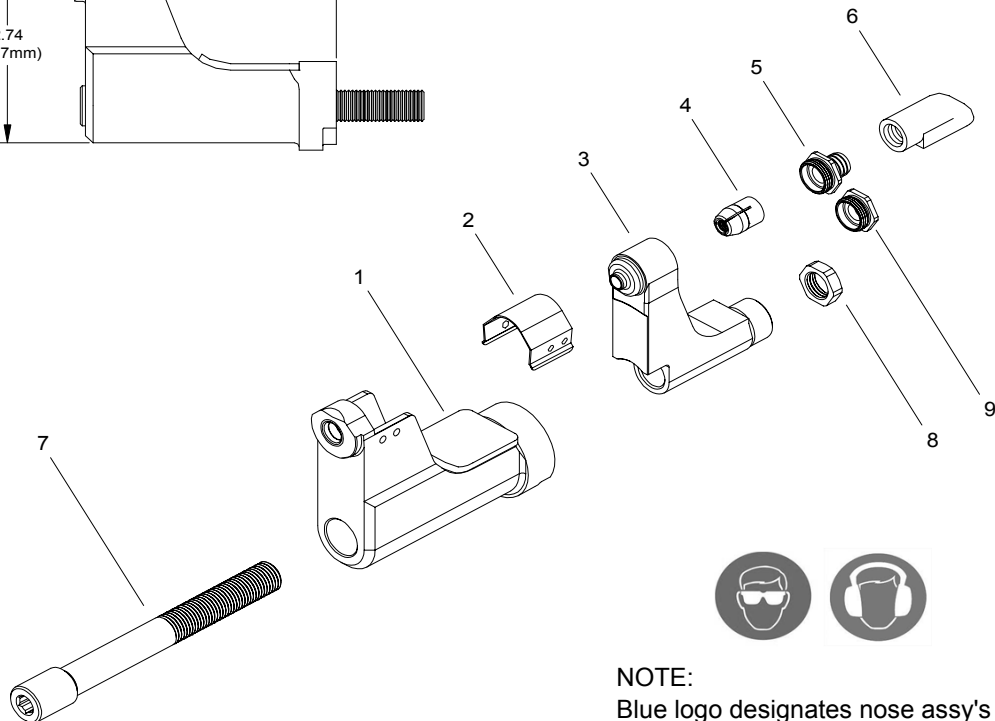

NOTE:
Blue logo designates nose assy's for lightweight GP® fasteners.

ASSEMBLY INSTRUCTIONS:

On front of GBP206A-375 Installation Tool remove screw and stop. With collet placed in anvil, install on tool. Slide drawbar thru anvil and collet. Screw nut on rear of draw bar and lock against collet. Screw draw bar into piston until it stops. Replace screw and stop on tool.

*Use Adapter No. 751206.

**Use Adapter No. 353206.

3/11

GAGE BILT

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Non Self-Releasing 4mm, 5mm & 6mm Ø		MGP® Lockbolt		GBP206A-375	
				Alternate Tools: *GB731 & **GB745	
Ref. No.	Qty.	Description	MGP4-206F-34OS	MGP5-206F-34OS	MGP6-206F-34OS
1	1	Anvil	10455	15548	16644
2	1	Guard	60426	60426	60426
3	1	Collet	20553-1	20672-1	20682-1
4	1	Super-Grip Jaw Assembly	30543-S9	30654-S9	30862-S5
5	1	Barbed Retainer	70569	70569	70569
6	1	Deflector	61107	61107	61107
7	1	Drawbar	71121	71121	71121
8	1	Nut	70546	70546	70546
9	1	Cap	70571	70571	70571