



NOSE ASSEMBLY DATA SHEET

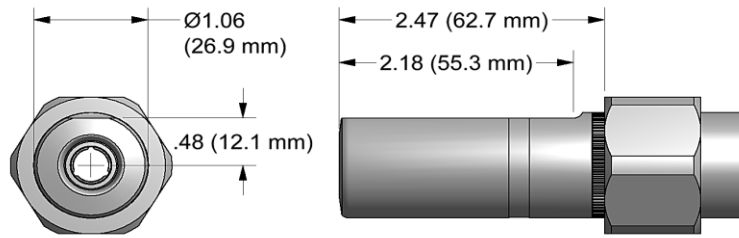

SLOTS ON RETAINING NUT STOP, SUPPLIED WITH TOOL, FIT OVER EARS ON ANVIL ASSY

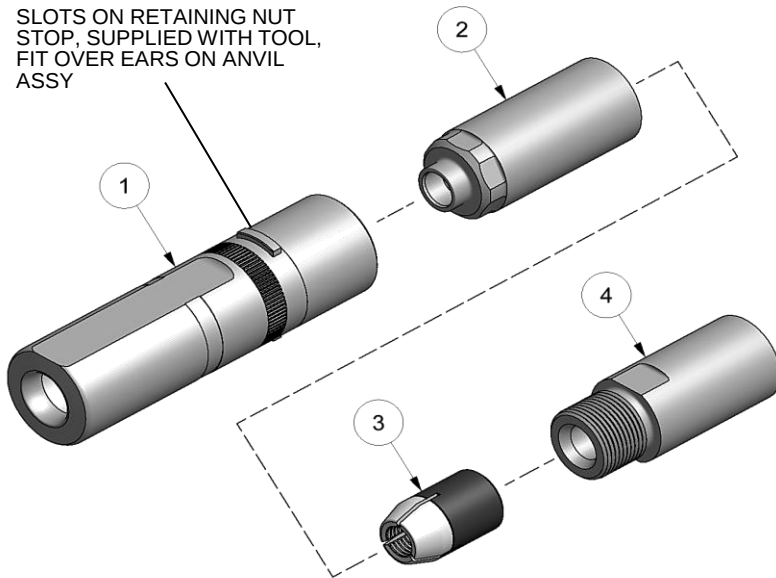

ASSEMBLY:

Note: If nose assy is assembled as it is when purchased new, follow steps 3-5 to attach to tool.

1. Insert super grip jaw assy (3) into rear of collet (2). (Note direction in exploded view).
2. Thread collet (2) to extension-collet (4) using flats provided.
3. Thread assembled collet (2) and extension-collet (4) onto piston of tool using flats provided and hex in rear of piston.
4. Slide anvil assy (1) over collet (2).
5. Slide retaining nut stop and retaining nut over ears on anvil (see exploded view) and tighten to tool.

DISASSEMBLY:

Reverse assembly instructions.

10/06 REV 5/17



*Anvil Assembly includes 35308 retainer.

**Red band designates nose assemblies for metric lightweight GP® fasteners

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB745
Non Self-Releasing 10mm Ø		MLGP® lockbolts	Alternate Tools: GB756 & GB2581(A)
Ref. No.	Qty.	Description	MLGP10-756-26
1	1	Anvil Assy	11041
2	1	Collet	21225
3	1	Super-Grip Jaw Assy	31226-S
4	1	Extension-Collet	71219