



NOSE ASSEMBLY DATA SHEET

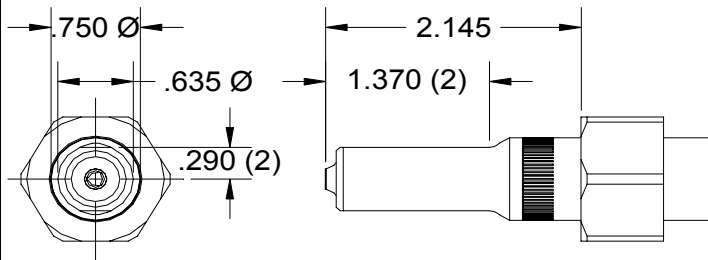

Use Hex-Key in rear of piston for Nose Assembly attachment.

Use Hex-Key in rear of collet extension for collet disassembly.

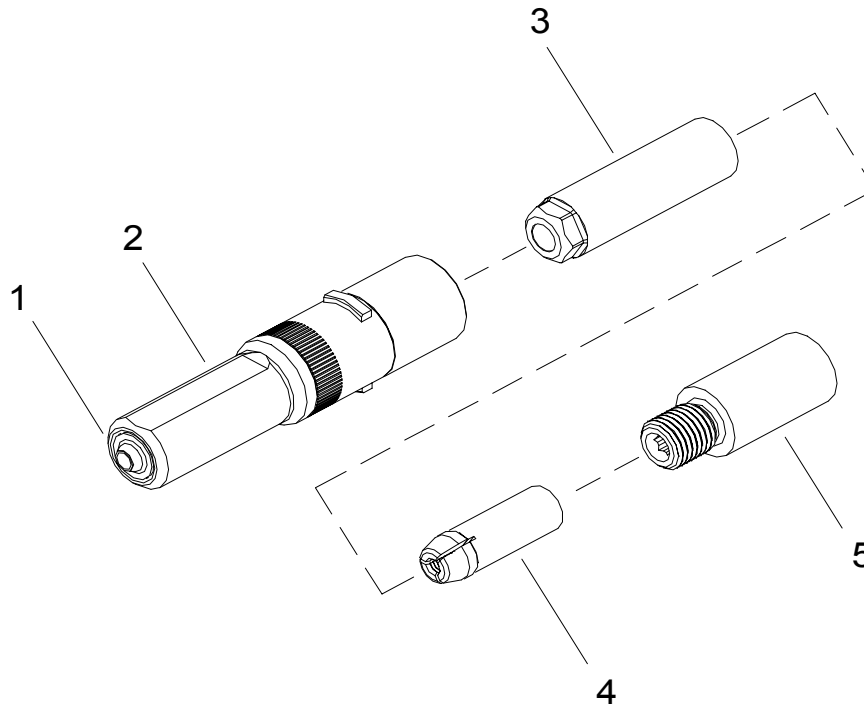

*GB752 for 3/16" Ø MAX.

**Anvil Assembly includes 35208 retainer.

***SB08 for maintenance and close clearance applications.



10/06 Rev. 9/12

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: *GB752	
Non Self-Releasing 3/16" & 1/4" Ø		BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT	Alternate Tools: GB713 & GB2480(A)	
Ref. No.	Qty.	Description	SB06-752B-20F	***SB08-752B-20F
1	1	Anvil-Driving	10683	10867
2	1	Anvil & Holder Assembly	12232	12239
3	1	Collet	20717	20717
4	1	Super-Grip Jaw Assembly	30655-S	30863-S
5	1	Collet Extension	70550	70550-2