


NOSE ASSEMBLY DATA SHEET

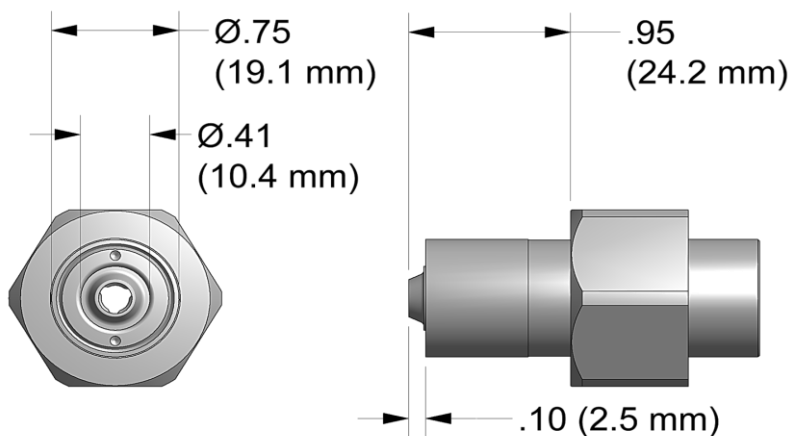


ASSEMBLY:

Notes:

- Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.
 - If nose assy is assembled as it is when purchased new, follow steps 2-4 to attach to tool.
- Insert super grip jaw assy (4) into rear of collet (3). (Note direction in exploded view).
 - Thread assembled collet (3) onto piston of tool using flats provided and hex in rear of piston.
 - Slide anvil assy (2) over collet (3).
 - Slide retaining nut over anvil assy and tighten to tool.

DISASSEMBLY:

Reverse assembly instructions.

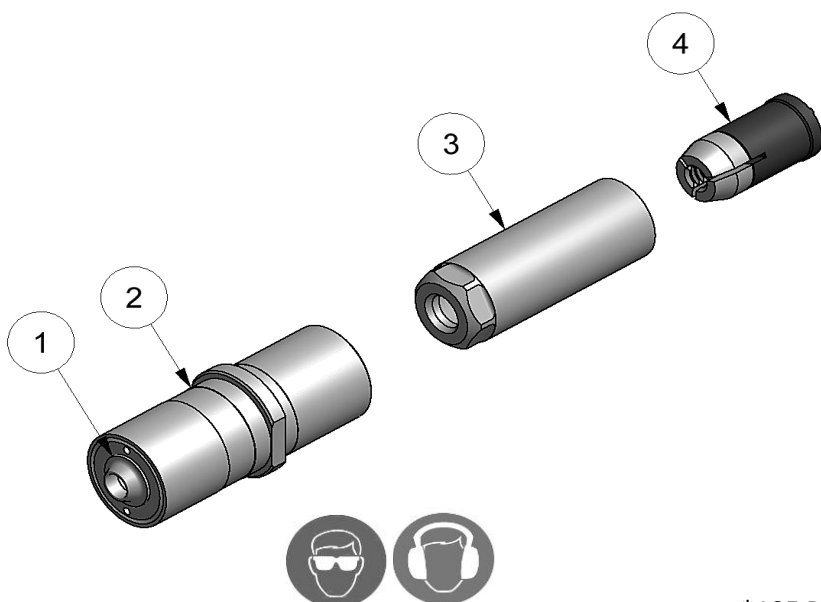

11/18 REV 10/25

*105 P.S.I. REQUIRED FOR MS90353 & MS90354

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fastener:	Recommended Tool:
Non Self-Releasing 1/4" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXIBOLT®, BACB30YY, YU, & YT CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER	GB714
			Alternate Tools: *GB713, *GB731 & GB2480(A)
Ref. No.	Qty.	Description	SB08-714-10
1	1	Anvil Insert	18007
2	1	Anvil Assembly (Inc. #1)	18049
3	1	Collet	20861
4	1	Super-Grip Jaw Assembly	30865-S

MAXI-BOLT® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION