



NOSE ASSEMBLY DATA SHEET

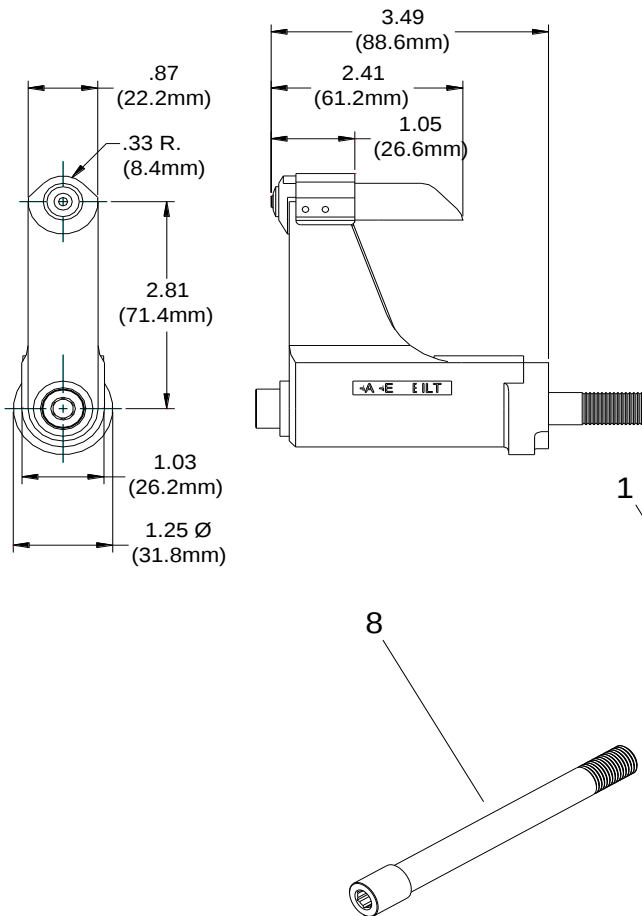

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (9) use for closed access applications only or when clearance is an issue!

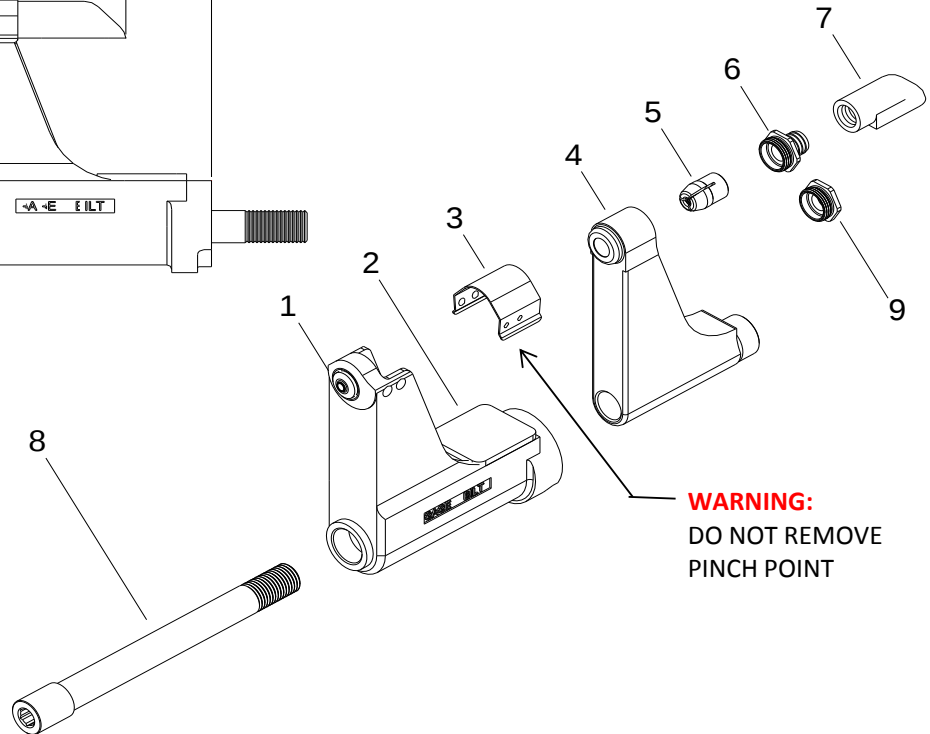

WARNING:
DO NOT REMOVE
PINCH POINT

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-375(A) Installation tool, remove screw and stop. With collet placed in anvil install on tool. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.



*Use Adapter No. 751206.

**Use Adapter No. 353206.

12/13

GAGE BILT

MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500

Clinton Twp. MI 48038 (586) 226-1505 Fax

e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB206-375(A)		
Non Self-Releasing 1/8", 5/32", 3/16" & 1/4" Ø		UNIMATIC® SINGLE ACTION NAS1919 S & U & NAS1921 S & U WITH DRIVE WASHER NAS9301-NAS9312 M7885 BACR12FP/FR & BACR15GF/GK		Alternate Tools: *GB752, **GB745 & *GB722		
Ref. No.	Qty.	Description	SMLS04- 206A-35OS	SMLS05- 206A-35OS	SMLS06- 206A-35OS	SMLS08- 206A-35OS
1	1	Anvil Insert	10426	10563	10684	10868
2	1	Anvil & Holder Assembly	12334	12331	12332	12333
3	1	Guard	60426	60426	60426	60426
4	1	Collet	20720	20720	20720	20720
5	1	Super-Grip Jaw Assy.	30425-S7	30545-S11	30656-S10	30864-S12
6	1	Barbed Retainer	70569	70569	70569	70569
7	1	Deflector	61107	61107	61107	61107
8	1	Drawbar	71134	71134	71134	71134
9	1	Cap	70571	70571	70571	70571