



NOSE ASSEMBLY DATA SHEET

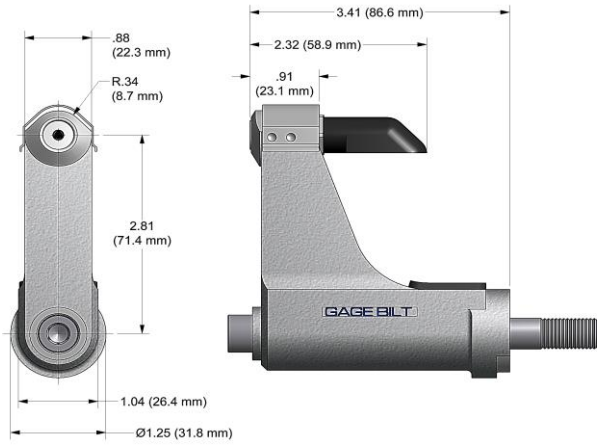

CAUTION:

Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (9) use for closed access applications only or when clearance is an issue!

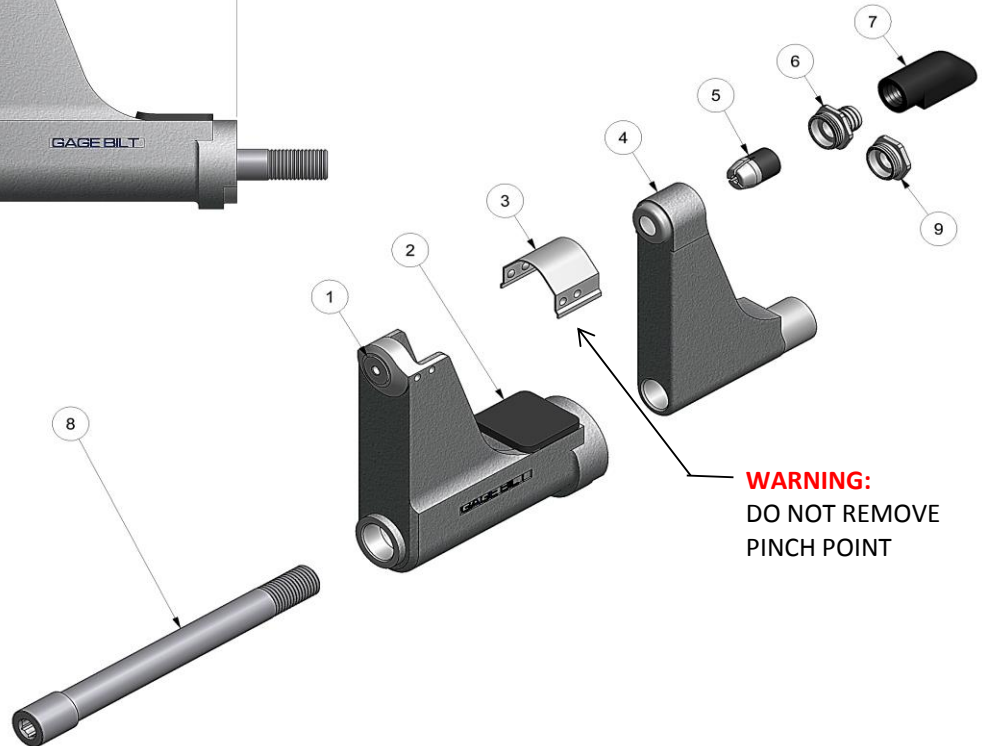

WARNING:

DO NOT REMOVE
PINCH POINT

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-375(A) Installation tool, remove screw and stop. Place collet in anvil. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Install assembly on tool. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.



*Use Adapter No. 751206.

**Use Adapter No. 353206.

4/11 REV. 3/15

GAGE BILT

MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500

Clinton Twp. MI 48038 (586) 226-1505 Fax

e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB206-375(A)		
Non Self-Releasing 1/8", 5/32", 3/16" & 1/4" Ø		UNIMATIC® SINGLE ACTION NAS1919S & U/NAS1921S & U WITH DRIVE WASHER		Alternate Tools: *GB752, **GB745 & *GB722		
Ref. No.	Qty.	Description	UBR04-206A-35OS	UBR05-206A-35OS	UBR06-206A-35OS	UBR08-206A-35OS
1	1	Anvil Insert	10486	15598	16025	18013
2	1	Anvil & Holder Assy	12338	12260	12261	12262
3	1	Guard	60426	60426	60426	60426
4	1	Collet	20720	20720	20720	20720
5	1	Super-Grip Jaw Assy	30425-S7	30545-S11	30656-S10	30864-S12
6	1	Barbed Retainer	70569	70569	70569	70569
7	1	Deflector	61107	61107	61107	61107
8	1	Drawbar	71134	71134	71134	71134
9	1	Cap	70571	70571	70571	70571