


NOSE ASSEMBLY DATA SHEET

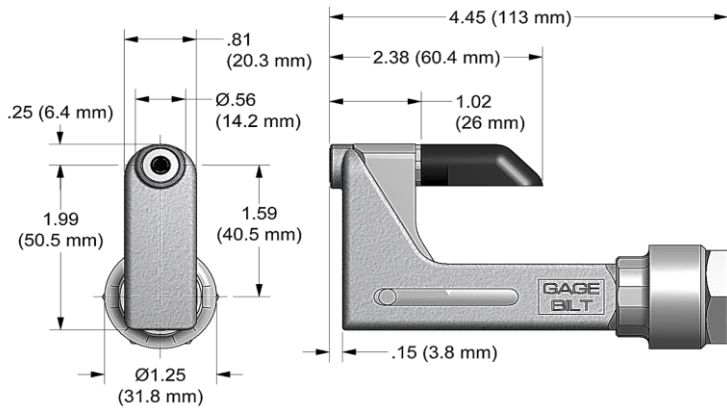


CAUTION:

Do not operate if pintail deflector is removed.
Pintail may eject forcibly.
SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

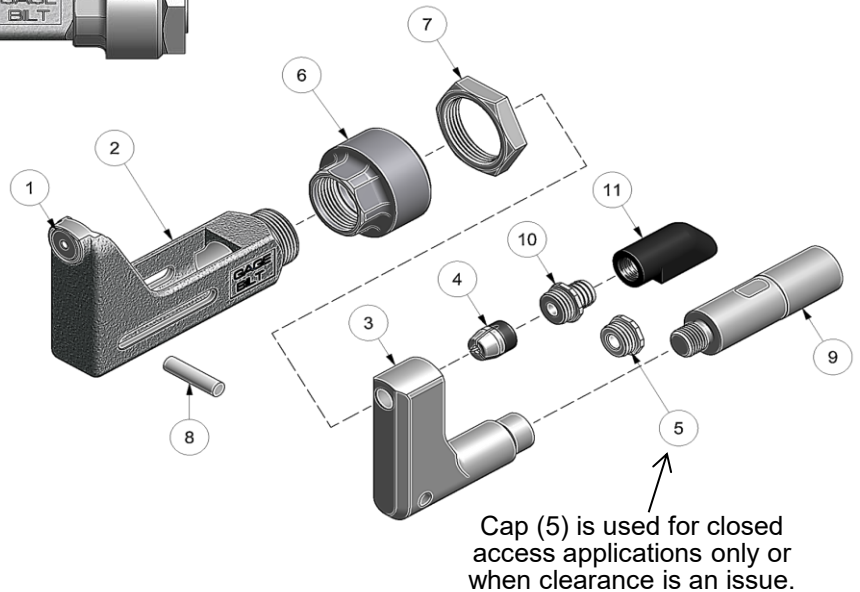

Cap (5) is used for closed access applications only or when clearance is an issue.

10/17 REV 10/25



*UBR08-752B-430S is designed for aluminum fasteners only.
**Use Adapter #745751 & DO NOT use # (7) Jam Nut 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 1/4" Ø		NAS1900 S & U SERIES UNIMATIC® BLIND RIVET (SINGLE ACTION) WITH DRIVE WASHER (ALUMINUM ONLY)	GB722
			Alternate Tools: GB713 & **GB745
Ref. No.	Qty.	Description	*UBR08-752B-430S
1	1	Nose Tip	18013
2	1	Anvil & Holder Assembly	12043
3	1	Collet	20911
4	1	Super Grip Jaw Assembly	30864-S16
5	1	Cap	60428
6	1	Anvil Adapter	70344
7	1	Jam Nut	70336
8	1	Pin	70468
9	1	Collet Adapter	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107