


NOSE ASSEMBLY DATA SHEET

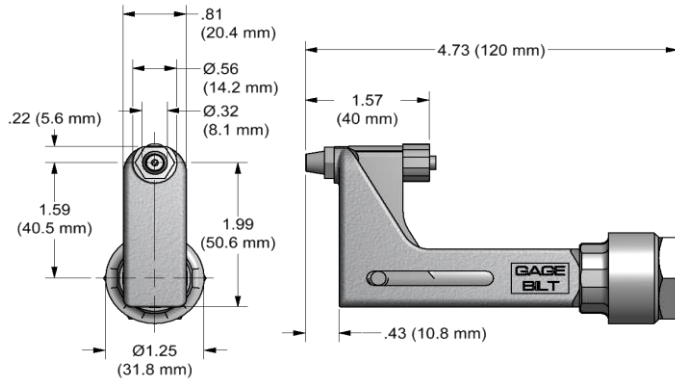


CAUTION:

Pintail may eject forcibly. Use for closed access applications only to prevent SEVERE PERSONAL INJURY!

Attachment:

Apply blue Loctite® 242 to anvil adapter (8) and adapter-collet (11) threads. Screw jam nut (70336) onto nose fitting of tool at least 3/4". Screw nose assembly onto nose fitting of tool until it stops, then back off until nose is in desired position. (Warning: Do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344).

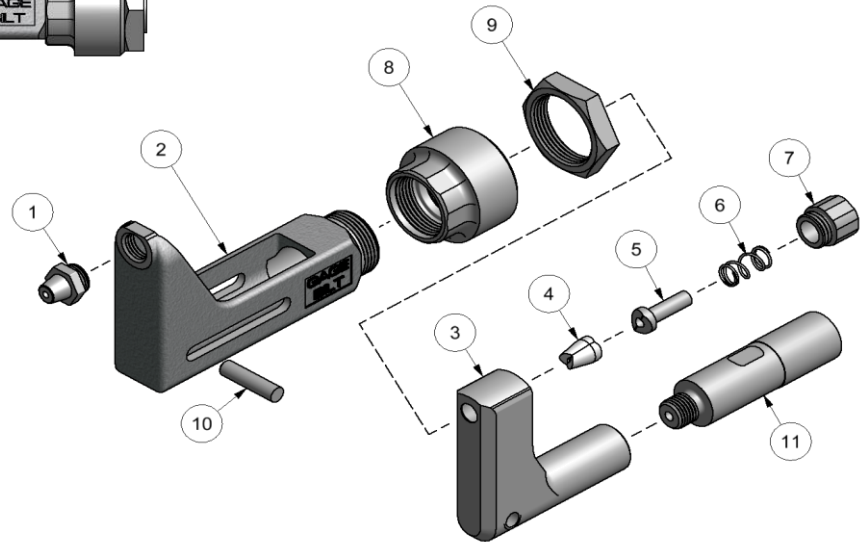

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.



2/18 REV 10/25

*USE ADAPTER 745751 & DO NOT USE # (9) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:
Non Self-Releasing 3/32" Ø		NUT PLATE RIVETS MS20600 SERIES CCR244/264/274 MS/9SP/PT BACR15CC/CF/DA/DR		GB751
				Alternate Tools: GB752, GB722, GB2480(A) & *GB745
Ref. No.	Qty.	Description		3NP-751A-43OS
1	1	Nose Tip		10231
2	1	Anvil Holder		13536
3	1	Collet		20915
4	1	Jaw Set		30617
5	1	Follower		40506
6	1	Spring		50418
7	1	Cap		60429
8	1	Anvil Adapter		70344
9	1	Jam Nut		70336
10	1	Pin		70468
11	1	Adapter-Collet		70332

LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.