


NOSE ASSEMBLY DATA SHEET

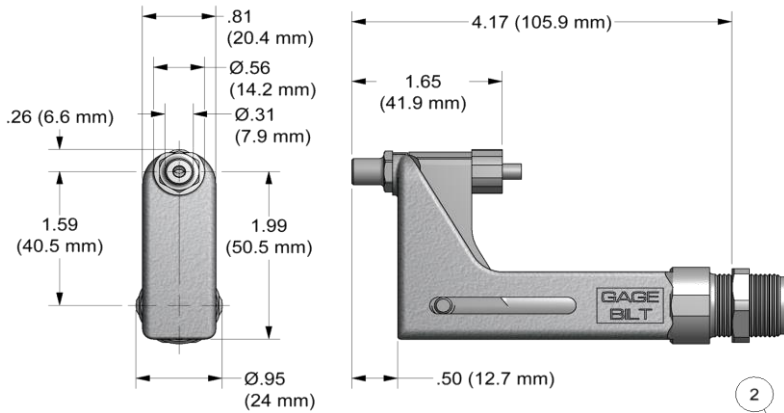


CAUTION:
Pintail may eject forcibly. Use for
closed access applications only to
prevent SEVERE PERSONAL INJURY!

Attachment:

Notes:

A. Apply Vibra-tite® p/n/ 405125 to all threads
and allow it to set 20 minutes prior to assembly.

Screw adapter-collet (11) onto piston of tool.
Screw anvil adapter (8) into nose fitting of
tool. Screw nose assembly onto tool until it
stops then back off until nose is in desired
position. (**Warning:** do not back off nose
assembly more than one complete turn).
Lock locknut (9) against face of adapter (8).

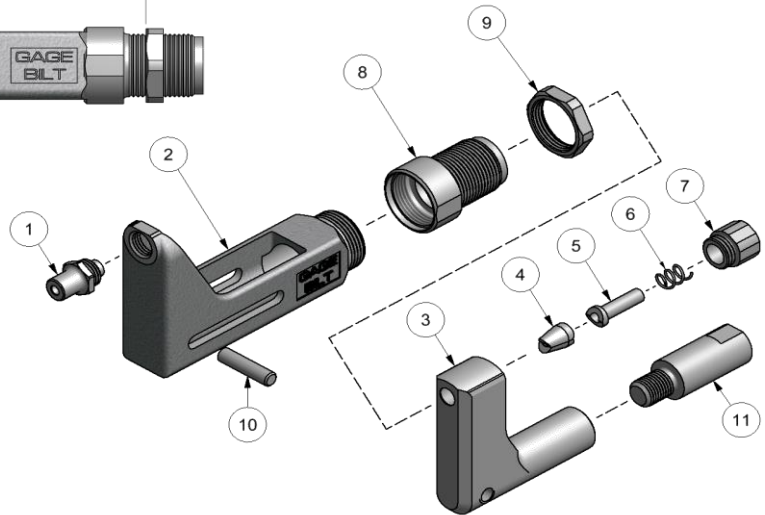

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.



6/23 REV 2/24

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB704
Self-Releasing 3/16" Ø		POP® OPEN END NAIL RIVETS		
Ref. No.	Qty.	Description	6N-704-40OSMDL	
1	1	Anvil Insert	10204-25	
2	1	Anvil Holder	13536	
3	1	Collet	20915	
4	1	Jaw Assembly	30617	
5	1	Follower	40304-2	
6	1	Spring	A-1503	
7	1	Nut Cap	60429	
8	1	Anvil Adapter	70347	
9	1	Lock Nut	70104	
10	1	Pin	70468	
11	1	Adapter-Collet	70473	

POP® IS A REGISTERED TRADEMARK OF EMHART TEKNOLOGIES. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.