



NOSE ASSEMBLY DATA SHEET

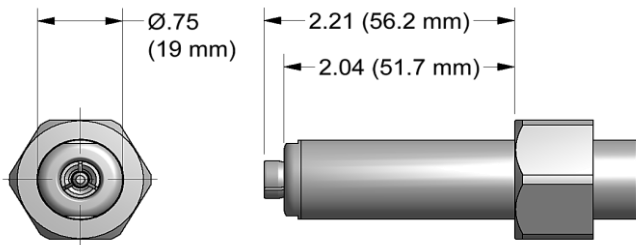

APPLY LOCTITE® C5-A® ANTI-SEIZE LUBRICANT (408183) OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE DIAMETER OF ANVIL.

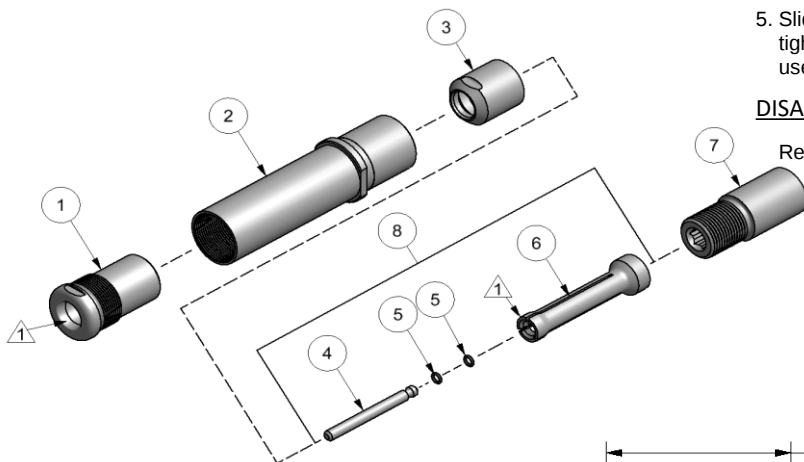

ASSEMBLY:

Notes:


- Apply Vibra-tite® p/n/ 405125 to threads on anvil (1) and allow it to set 20 minutes prior to assy.
 - If nose assy is assembled as it is when purchased new, follow steps 3-5 to attach to tool.
- Thread anvil (1) Into anvil holder (2).
 - Insert limit rod (4) with o-rings attached, into i.d. of puller (6) and push limit rod (4) thru i.d. of puller (6) until it bottoms out.
 - Slide puller cap (3) over assembled puller (6) and thread puller cap (3) onto Extension-Collet (7). Thread assembled Extension-Collet (7) to piston on tool and tighten to piston on tool using flats provided.
 - Slide assembled anvil (1) and anvil holder (2) over assembled puller cap (3) and assembled puller (6) on tool.
 - Slide retaining nut from tool over anvil holder (2) and tighten nose assy to tool. (Note: Retaining nut stop not used on this nose assembly).

DISASSEMBLY:

Reverse assembly instructions.

WARNING:

EXPOSED MOVING PARTS. KEEP HANDS OFF DURING OPERATION TO PREVENT PERSONAL INJURY.



APPLY LOCTITE® C5-A® ANTI-SEIZE LUBRICANT (408183) OR EQUIVALENT TO OUTSIDE OF PULLER AS SHOWN TO KEEP FROM WEARING AGAINST ANVIL.

10/19 REV 10/24



GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB735
Self-Releasing 1/4"Ø		Bobtail® Lockbolt		
Ref. No.	Qty.	Description		BOB08-735-20
1	1	Anvil		18020
2	1	Anvil Holder		13505
3	1	Puller Cap		70895
4	1	Limit Rod		70896
5	2	O'ring		408529
6	1	Puller		30879
7	1	Extension-Collet		70670
8	1	Puller Assembly-Complete		30894

BOBTAIL® IS A REGISTERED TRADEMARK OF HOWMET AEROSPACE. LOCTITE® AND C5-A® ARE REGISTERED TRADEMARKS OF HENKEL CORPORATION U.S.A. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.